

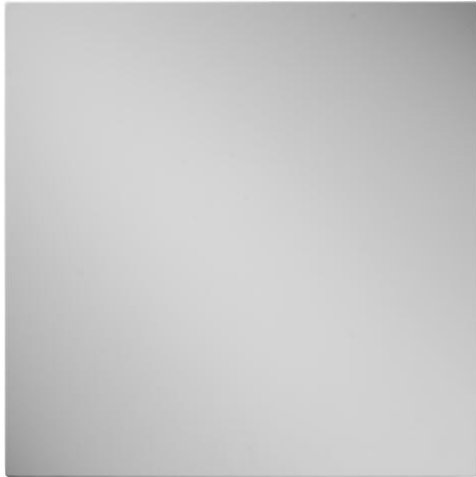


Smooth Filler for 9/16 Grid Ceiling Tile

TL-0300

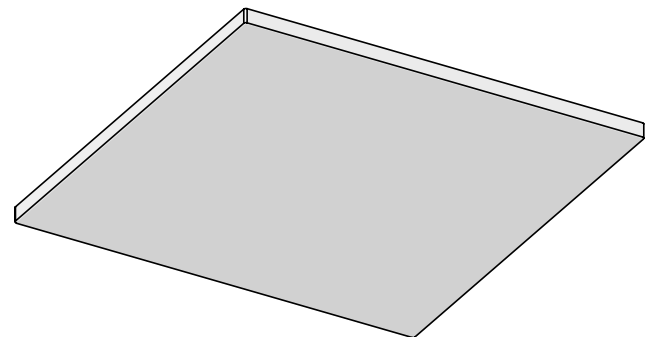

SIZE:	2' x 2'
MATERIAL:	Gypsum, glass fibers, and other non-combustible aggregates
WEIGHT:	8.8 lbs/tile
STANDARD FINISH:	White satin latex paint
CUSTOM / FAUX FINISHES:	Available upon request
FIRE RATING:	Class A, with zero smoke spread, zero flame spread, and zero fuel contribution
INSTALLATION:	Drop into any standard commercial 9/16 in T-Bar suspension grid, consisting of pre-punched roll-formed steel with exposed flange surface
EASY TO FIELD CUT:	For sprinklers, recessed lights, pendants and vents.
FACTORY CUT HOLES AND RADII FOR PERIMETERS:	Inquire
CUSTOM DESIGNS AVAILABLE:	Inquire
MADE IN USA:	Handmade, one-at-a-time in Milwaukee, WI

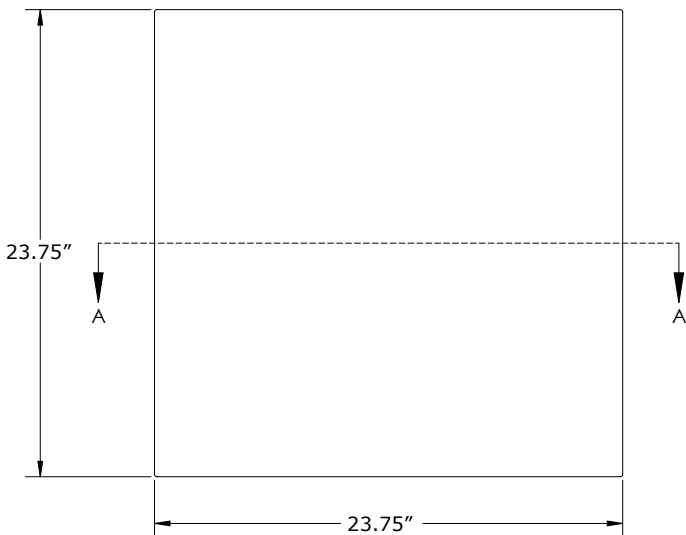

ABOVE GRID

